


Vacc-Safe

Combined Fridge/Freezer VSC-40L350

Suitable for storing **vaccines, medicines** and **laboratory products and samples** between -40°C and -86°C in pharmacies, hospitals, medical clinics and laboratories.



Top Cooling.

Strong cooling airflow from the top to the bottom, works as an air curtain to block the external hot air from entering the refrigerator when the door is opened.




Increased Product Lifespan.

Dissipates heat 20% more effectively to improve life expectancy of core parts.




Multi-layer Silicone Sealing Structure.

Provides a tight seal between inner and outer door for better insulation.



Heated Pressure Equalization Port.

Allows users to re-open the main door quickly.



Improved Cooling Performance.

Patented Smart-Inverter technology significantly reduces the amount of energy consumed whilst maintaining superior temperature stability.



Built-In Backup
Battery



Security



Single LED Display



USB Data



Lockable


Vacc-Safe Australia's leading **vaccine** and **medical** cold storage **manufacturer**

1/13-15 Kevlar Cl Braeside, VIC 3195

(03) 8338 1205

query@vaccsafe.com.au

vaccsafe.com.au

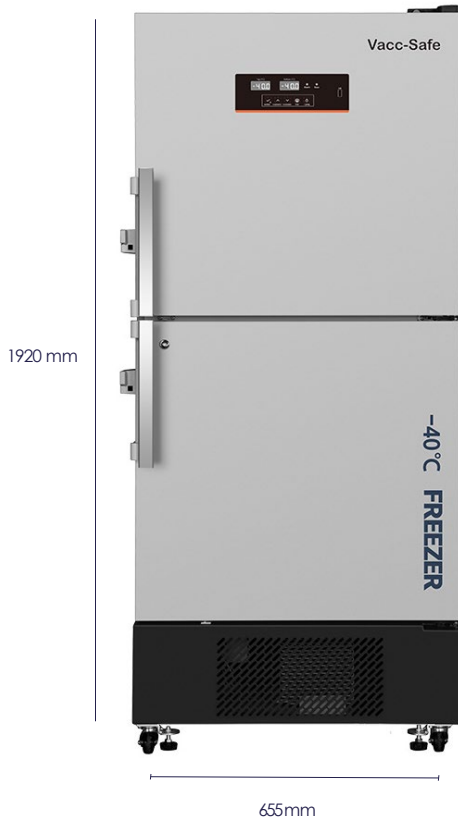

Product structure data

Temperature Range	Fridge 2°C to 8°C Freezer -20°C to -40°C
Fridge Storage Volume (L)	206L Fridge Capacity / 144 L Freezer Capacity
Product Dimensions (mm) (wxdxh)	695x655x1920
Interior Dimensions (mm) (wxdxh)	Fridge 600x505x690 Freezer 540x480x560
Packing Dimensions (mm) (wxdxh)	755x715x2025
Net/Gross Weight	109/121

Technical data

Compressor Type	Fixed Frequency
Cooling Type	Fridge, Forced air cooling Freezer, Direct Cooling
Defrost Type	Fridge, Auto defrost Freezer, Manual defrost
Climate Class	N
Rated Voltage/Frequency (V/Hz)	220V/50Hz
Rated Power (w)	350
Rated Current (A)	3.2
Energy Consumption (kwh/24h)	3.0
Decibel Rating (dBA)	50
Refrigerant/Amount (g)	mixed

Control

Sensor Qty	4
Sensor Type	NTC
Controller	Microprocessor
Display	LED

Product Performance

Temperature Accuracy	0.1°C
Temperature uniformity/°C	≤1.5°C

Alarms

Yes	Sound, light, power failure, sensor failure, environment temperature, door ajar, high temperature, low temperature, remote.
-----	---

Accessories

USB	Y
Lock	Y
Backup Battery	Y
Backup Battery Endurance	15h
Shelves/ Drawers Qty	Fridge 3/ Freezer 3
Cable Port	Y
Castors/type	2 + 2 Levelling Feet